







-  WATER COOLED
-  THREE PHASE
-  50 Hz
-  DIESEL

#### Generating Rates

Services		PRP	STANDBY
Power	kVA	180	200
Power	kW	144	160
Current	A	260	289
Standard Voltage	V	230 / 400	
Revolution Per Minute	r.p.m	1500	
Rated at power factor	Cos Phi	0,8	

#### Standard Features

- 4 Stroke, 1500 RPM, water cooled heavy duty diesel engine
- Protection system on manual run
- Flexible oil pipes and oil draining valve
- Pre-heater
- Lubrication oil and anti-freeze
- 4 Poles, synchrotype, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis
- Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram
- User manual and operating manual

#### Optional Equipments

- Soundproof canopy
- Automatic transfer switch
- Circuit breaker
- Trailer
- External fuel tank
- Heating system for fuel tank
- Oil heater
- Fuel filling system ( Automatic / Manuel )
- Analog indicators
- 1 Phase - 3 Phase switch plugs
- Alarm system for fuel level
- Remote control and monitoring

**Stand By Power** : Supplying of emergency electrical power at variable load, in the event of normal utility power failure. This rating is maximum power, no overload capability is available.

**Prime Power** : Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility power failure. 10% over load capability is available.

**Engine Specifications****Diesel Engine**

Brand		VOLVO PENTA
Model		TAD732GE
Engine Power Stand BY	kWm / hp	179 / 243
Revolution Per Minute	r.p.m	1500
Total Displacement	L	7.15
Cylinders Orientation		6 SINGLE LINE
Bore x Stroke	mm x mm	108 x 130
Compression Orientation		18:1
Governor Type		ELECTRONIC
Aspiration System		TURBO CAC
Injection		DIRECT
Cooling		WATER COOLED
Electrical System	VDC	24
Lub-Oil Capacity	L	34
Engine Coolant Capacity	L	37.2
Fuel Tank Capacity	L	368
Maximum Exhaust Temperature	°C	542
Maximum Exhaust Gas Flow	m <sup>3</sup> / H	2106
Maximum Allowed Back Pressure	kPa	5
Cooling Air Flow	m <sup>3</sup> / H	256.23
Fuel Consumption 50 %	L / h	33
Fuel Consumption 75 %	L / h	32
Fuel Consumption 100 %	L / h	33

• Replacable cylinder jacket • Dry type replacable oil filter • Heat-resistant radiator for 50 °C

**Alternator Specifications****Alternator**

Output Voltage	V	230 / 400
Frequency	Hz	50
Stationary Voltage Regulation	±	1 %
Short Circuit Current		%300 (10 sec)
Insulation		H
Protection		IP 23
Efficiency	%	92.7
Overloading		110 % FOR 1 HOUR
Power Factor	cos Q=0,8	0.8
Total Harmonic Distortion Rate		<3%
Connection Type		STAR
Number Of Pole		4
Number Of Bearing		SINGLE

- 4 Poles, Self-Excitation, Brushless, Synchronotype alternator
- Electronic type automatic voltage regulator (AVR)
- Self-Cooled

Update Date : 13-02-16 17:02

KJV200ds-2


### Dimensions Without Canopy

Dimensions and Weight		
Length ( L )	mm	2800
Height ( H )	mm	1950
Width ( W )	mm	1150
Wet weight	Kg	1720
Fuel Tank Capacity	L	368



### Dimensions With Canopy

Dimensions and Weight		
Length ( L )	mm	3500
Height ( H )	mm	2200
Width ( W )	mm	1150
Wet weight	Kg	2050
Fuel Tank Capacity	L	368

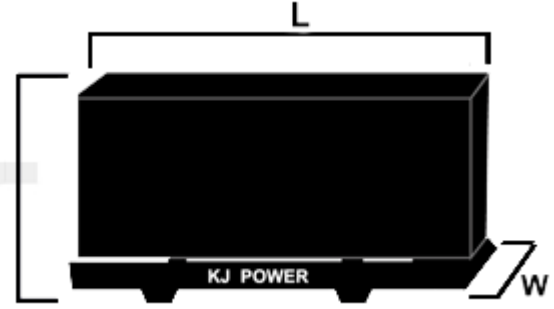

### Control Panel Features

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable language
- Waveform display of V & I
- Harmonic analysis of V & I
- Synchroscope & check synch
- Allows closed transfers
- 16Amp MCB & GCB outputs
- 8 configurable digital outputs
- Outputs expandable to 40
- 4 configurable analog inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Multiple nominal conditions
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal aging of gensets
- Manual "speed fine adjust" on selected ECUs
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge0 run enabled
- Combat mode support
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem & Ethernet diagnostics
- Configurable through USB, RS-485, Ethernet and GPRS
- Free configuration program
- Allows SMS controls
- Ready for central monitoring Ethernet and GPRS
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity ( USB & RS232 )
- Dynamic DNS support
- Easy USB firmware upgrade
- IP65 rating with standard gasket

