



WATER COOLED



THREE PHASE



50 Hz



DIESEL

Generating Rates

Services		PRP	STANDBY
Power	kVA	100	110
Power	kW	80	88
Current	A	144	159
Standard Voltage	V	230 / 400	
Revolution Per Minute	r.p.m	1500	
Rated at power factor	Cos Phi	0,8	

Standard Features

- 4 Stroke, 1500 RPM, water cooled heavy duty diesel engine
- Protection system on manual run
- Flexible oil pipes and oil draining valve
- Pre-heater
- Lubrication oil and anti-freeze
- 4 Poles, synchrotype, single bearing, brushless alternator
- Batteries and cables
- Electrostatic paint coated, steel, welded chassis
- Fuel tank housed in the chassis
- Industrial type silencer
- Electronic battery charger
- Electrical wiring diagram
- User manual and operating manual

Optional Equipments

- Soundproof canopy
- Automatic transfer switch
- Circuit breaker
- Trailer
- External fuel tank
- Electronic governor
- Heating system for fuel tank
- Oil heater
- Fuel filling system (Automatic / Manuel)
- Analog indicators
- 1 Phase - 3 Phase switch plugs
- Alarm system for fuel level
- Remote control and monitoring

Stand By Power : Supplying of emergency electrical power at variable load, in the event of normal utility power failure. This rating is maximum power, no overload capability is available.

Prime Power : Supplying of electrical power at variable load for an unlimited number of hours in the event of normal utility power failure. 10% over load capability is available.

Engine Specifications**Diesel Engine**

Brand		VOLVO PENTA
Model		TAD531GE
Engine Power Stand BY	kWm / hp	98 / 133
Revolution Per Minute	r.p.m	1500
Total Displacement	L	4.76
Cylinders Orientation		4 SINGLE LINE
Bore x Stroke	mm x mm	108 x 130
Compression Orientation		18:1
Governor Type		MECHANICAL
Aspiration System		TURBO CAC
Injection		DIRECT
Cooling		WATER COOLED
Electrical System	VDC	12
Lub-Oil Capacity	L	13
Engine Coolant Capacity	L	19.7
Fuel Tank Capacity	L	200
Maximum Exhaust Temperature	°C	557
Maximum Exhaust Gas Flow	m ³ / H	1104
Maximum Allowed Back Pressure	kPa	5
Cooling Air Flow	m ³ / H	134.32
Fuel Consumption 50 %	L / h	18.4
Fuel Consumption 75 %	L / h	18
Fuel Consumption 100 %	L / h	18.5

• Replacable cylinder jacket • Dry type replacable oil filter • Heat-resistant radiator for 50 °C

Alternator Specifications**Alternator**

Output Voltage	V	230 / 400
Frequency	Hz	50
Stationary Voltage Regulation	±	1 %
Short Circuit Current		%300 (10 sec)
Insulation		H
Protection		IP 23
Efficiency	%	90.6
Overloading		110 % FOR 1 HOUR
Power Factor	cos Q=0,8	0.8
Total Harmonic Distortion Rate		<3%
Connection Type		STAR
Number Of Pole		4
Number Of Bearing		SINGLE

- 4 Poles, Self-Excitation, Brushless, Synchronotype alternator
- Electronic type automatic voltage regulator (AVR)
- Self-Cooled

Update Date : 13-02-16 17:02

KJV110ds-2


Dimensions Without Canopy

Dimensions and Weight		
Length (L)	mm	2600
Height (H)	mm	1780
Width (W)	mm	1100
Wet weight	Kg	1390
Fuel Tank Capacity	L	200



Dimensions With Canopy

Dimensions and Weight		
Length (L)	mm	3100
Height (H)	mm	1980
Width (W)	mm	1100
Wet weight	Kg	1680
Fuel Tank Capacity	L	200

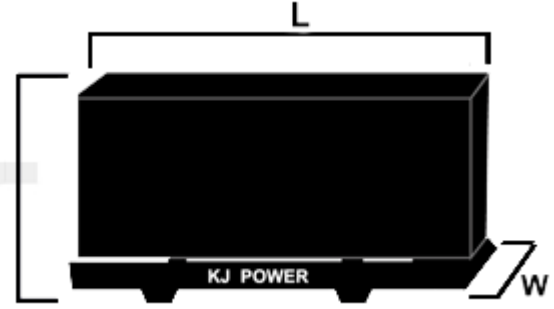

Control Panel Features

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable language
- Waveform display of V & I
- Harmonic analysis of V & I
- Synchroscope & check synch
- Allows closed transfers
- 16Amp MCB & GCB outputs
- 8 configurable digital outputs
- Outputs expandable to 40
- 4 configurable analog inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Multiple nominal conditions
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal aging of gensets
- Manual "speed fine adjust" on selected ECUs
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge0 run enabled
- Combat mode support
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem & Ethernet diagnostics
- Configurable through USB, RS-485, Ethernet and GPRS
- Free configuration program
- Allows SMS controls
- Ready for central monitoring Ethernet and GPRS
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity (USB & RS232)
- Dynamic DNS support
- Easy USB firmware upgrade
- IP65 rating with standard gasket

